

Luna Grab Bar with Towel Bar

LL – 2500 Series

Stainless steel screws for wood backing & 4 hollow wall togglers included with every bar!
* *Wingit Compatible (wingits sold separately)*

Luna Grab Bar
with Towel Bar

Application Use:

Architectural

Commercial

Institutional

Residential

Specifications

With a beautiful, high-falling curve that combines the functionality of a grab bar and towel bar. The Luna Grab Bar with Towel Bar can support weight up to 250lbs. when properly installed. It is made from high quality 18 gauge 1.25" diameter 304 stainless steel and available in left-handed or right-handed configurations.

Convenient mounting flange post with set screws allow for easy flange access during installation yet preserving the clean finished look of the concealed flange cover. Using a wingit compatible flange base and 5 optional screw hole ports makes locating on a stud or hollow wall even easier than ever. 4 hollow wall togglers included with every bar.

The LifeLine Collection has been designed, built, and tested to 250lbs exceeding HUD, FHA, VA, ADA, ANSI and other federal, provincial, and local codes.

*Grab Bars can only be as strong as what they are mounted to. It is imperative when installing any safety product to consult with a qualified contractor to insure you have the sufficient backing to support the seat.



The Bathing Collection

All Luna Grab Bars with Towel Bar ship complete with easy to follow instructions, mounting hardware for stud framing and hollow walls. The LifeLine Collection has been designed, built and tested to 250lbs.


The Luna Grab Bar with Towel Bar comes in 4 standard finishes.

RIGHT HANDED CONFIGURATION:

LL-2500 RH-SS	SATIN FINISH STAINLESS STEEL
LL-2500 RH-PC	POLISHED CHROME
LL-2500 RH-OWB	OLD WORLD BRONZE
LL-2500 RH-MB	MATTE BLACK

LEFT HANDED CONFIGURATION: (shown)

LL-2510 LH-SS	SATIN FINISH STAINLESS STEEL
LL-2510 LH-PC	POLISHED CHROME
LL-2510 LH-OWB	OLD WORLD BRONZE
LL-2510 LH-MB	MATTE BLACK

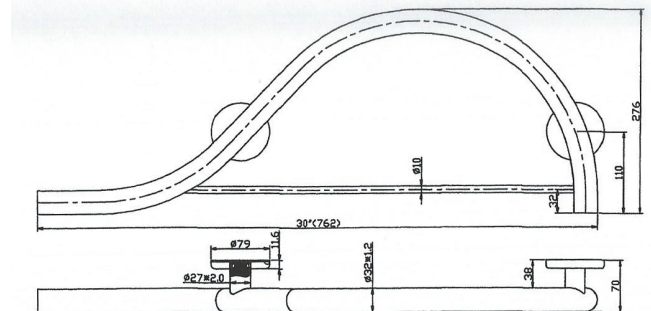

Custom Finishes Available Upon Request

Dimension tolerances +/- 3/16"